



# RC1500

## Tracking /Remote Controlled Antenna Controller for Single Axis Antennas



### FEATURES

- **Inclined-Orbit tracking**  
*Allows single axis tracking for modest-sized antennas with a motorized declination axis*
- **Dual Speed**  
*For fast slewing, fine positioning, user programmable*
- **Three Track Modes**  
*Step Track, Memory & Search modes supported*
- **RS-422 PC Control Interface**  
*Automated control with many popular packages; basic PC-control software is included*
- **Polarization Control Interface**  
*Automatic or manual polarization control for three-wire Polarotor™ or optional control for rotating feeds with potentiometer feedback*
- **Adapti-Drive™**  
*Maintains stable speed with varying load*
- **High-Resolution Pulse Sensor Interface**  
*Ensures accurate Ku-band positioning*
- **Solid-State Drive Circuitry**  
*Provides reliable, quiet operation, rated at 5A with over-current protection*
- **Software Controlled Limits**  
*Provides backup to mechanical limits*
- **Multi-Band Operation**  
*Supports C, Ku and L-band satellites*

**Research Concepts, Inc.**

5420 Martindale Road  
Shawnee, Kansas 66218-9680 USA  
Phone: (913) 422-0210  
Fax: (913) 422-0211  
E-mail: sales@researchconcepts.com

[www.researchconcepts.com](http://www.researchconcepts.com)

---

## OPERATIONAL OVERVIEW

---

The RC1500 was designed to provide years of reliable operation through the use of a heavy duty solid-state drive network coupled with a novel microcontroller-based fault monitoring system. The 5 amp rated drive output capability is adequate for either moving feed trackers or full-size linear actuators and the Adapti-Drive digital servo speed control optimizes antenna movement for today's demanding Ku-band applications. Additional features like an RS-422 communications port for PC control and a very user-friendly, menu scheme make the RC1500 a unique and highly adaptable piece of equipment. Overall, the RC1500 is well equipped to handle the demanding requirements for cost sensitive domestic and international inclined-orbit satellite tracking.

---


## TRACKING ALGORITHM

---

When using a modest-sized antenna in which the beam may be steered along the declination axis, (perpendicular to the geostationary arc) a satellite that is in an inclined orbit may be tracked with a single-axis antenna controller. The angular width of the "figure 8" pattern of the satellite's apparent motion is, in general, very small. For the mid-latitudes, this width is approximately:

$$W = 1.2 \times (\text{inclination})^2 / 115$$

or 0.26 degrees for a satellite with an inclination of 5 degrees.

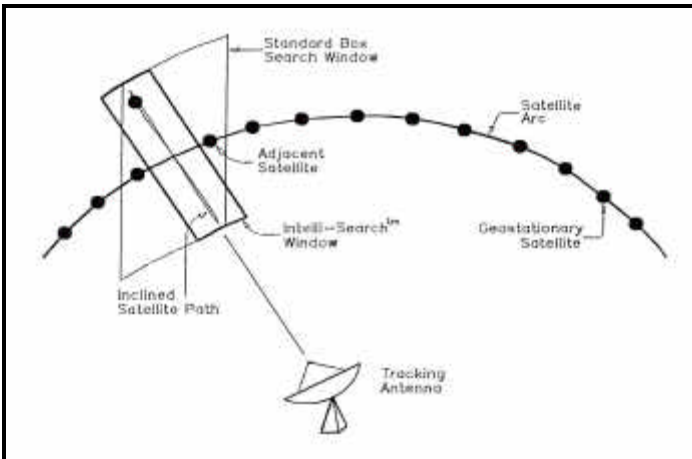

If the antenna beamwidth is larger than the width of the figure 8, it can track the satellite with single-axis, declination motion. An 11.5m C-band or an 3.8m Ku-band antenna would have a 3dB beamwidths of about 0.6 degree. Properly aligned, these antennas could track the satellite with less than 3dB error.

The tracking algorithm used by the RC2000 antenna controllers can be divided into 3 distinct parts - STEP\_TRACK, PROGRAM\_TRACK and SEARCH. To initiate the track process, the user jogs the antenna to the satellite and verifies the identity of the satellite. The system then enters STEP\_TRACK mode.

In **STEP\_TRACK** mode, the controller periodically peaks the receiver's AGC signal strength by jogging the antenna. The time and position are recorded in a track table maintained in the controller's non-volatile memory. The interval between peakups is

determined by antenna beamwidth (as determined from antenna size and the frequency band), satellite inclination, and a user specified maximum allowable error (in dB). STEP\_TRACK mode is active until a time is reached that corresponds to a segment of the satellite's motion which has previously been stored in the track table. When this occurs PROGRAM\_TRACK mode is activated.

In **PROGRAM\_TRACK** mode the controller smoothly moves the antenna to azimuth and elevation positions derived from entries in the track table. The time between movements is determined by the same factors which govern the time between peakup operations in STEP\_TRACK mode. In particular the user can specify the maximum allowable error between the antenna's actual position and the position specified by the track table. By increasing the maximum allowable error, antenna movements can be performed less frequently, thus avoiding unnecessary wear on the antenna actuators. In PROGRAM\_TRACK mode the accuracy of the track table is monitored by periodically peaking up the receiver AGC signal. If the error exceeds a level set by the user, all entries in the track table are flagged for update. The period between these accuracy checks is specified by the user and typically varies from once a day to once a week.

**SEARCH** mode is entered from STEP\_TRACK mode when the satellite signal has been lost. When the satellite is located, the controller re-enters the STEP\_TRACK mode.

---

## SPECIFICATIONS

---

---

### PHYSICAL

---

Size:	19.0" x 3.5" x 9.0" (rack)
Weight:	8.5 lbs.
Temperature:	0° - 50° C
Input Power:	115/230 VAC, 50/60 Hz., 40 W

---

### TRACK MODE

---

Antenna Size:	0.4 - 5.0 meters
Maximum Inclina-	+/- 10° standard
Tracking Modes:	Search, Step Track, Program Track
AGC Input:	0 to +10 VDC input range, 2MΩ input impedance

---

### DRIVE

---

Output:	36 VDC, 10 Amps; 150 VA
Sensor Input:	Pulse-type: Reed, Hall Effect, Optical
Polarization:	Standard Polarotor™ Interface, optional rotating Feed-drive at voltages from 5 - 36 VDC @ 2A max