

## APPENDIX BCN - INTEGRATED BEACON RECEIVER

Last Revised: 18 November 2014

This appendix describes the additional functions provided by the RC4000's integrated Beacon receiver option.

### 1.1 Appendix Organization

This appendix is provided as a supplement to the baseline RC4000 manual. The corresponding paragraphs in the baseline RC4000 manual are referred to when data specific to the Integrated Beacon Receiver option is described.

### 1.2 Features

This option provides the ability to manually and automatically tune an integrated beacon receiver for use during LOCATE and TRACK modes.

#### Software Configuration

RC4000 software configuration is presented in the form RC4Kabvwxyz where abvwxyz represents: (Mount manufacturer/Model) **ab** (Nav Sensor Option) **v** (Tracking Option) **w** (Remote Option) **x** (Receiver Option) **y** (Thor Receiver Option) **z**

This feature is categorized as one of the (Digit 12) TOP CARD RECEIVER options of the RC4000.

OPTION CATEGORY	DESIGNATOR	DESCRIPTION
Spectrum Analyzer/ Beacon Receiver	N	No integrated receiver supported
	A	ASC (Atlantic Satellite Corp.) Beacon
	B	Novella Beacon
	C	Avcom Spec An
	D	Avcom Spec An & DVB
	E	ASC Beacon & DVB
	F	Avcom Spec An & Novella Beacon
	G	Avcom SBS2 SpecAn/Beacon & DVB
	H	DVB-S2
	I	DVB-S2 & Novella
	J	DVB-S2 & SBS2 Spec An/Beacon
	N	None
	R	DVB Receiver
S	Novella Beacon & DVB	

Software supporting the integrated beacon receiver would therefore be designated in the form RC4Kabvwxyz.

#### Hardware Configuration

The beacon receiver hardware may be purchased in two configurations:

- 1) a complete "beacon receiver" that implements all functions described in this appendix or
- 2) a "beacon level detector" that performs a large subset of the beacon receiver functions

The Receiver Option software is used for both hardware configurations. Functions not implemented by the beacon level detector (such as attenuation setting) are ignored and appear transparent to the operation of the software. Functional and performance differences between the two hardware configurations are described in the remainder of the appendix.

### 1.3 Integrated Beacon Receiver Overview

For many tracking applications, it is desirable to monitor the satellite's beacon as an indication of received signal strength. Due to the relatively low power and narrow bandwidth of satellite beacons, specialized receiving equipment is required. This option allows the RC4000 ACU to internally house and control a high performance L-band beacon tracking receiver manufactured by Novella Satcoms.

The beacon receiver is designed to lock to and measure the level of conventional continuous wave beacons as well as BPSK modulated beacons. High immunity against false lock to telemetry subcarriers is achieved by the use of a universal anti-sideband device that is capable of identifying any sideband located between 2.5 kHz to 75 kHz away from the carrier.

The L-band beacon signal is input to the beacon receiver from the Antenna Interface of the RC4000. Via user programming, beacon frequency may be selected to a resolution of 10 kHz. The receiver is capable of automatically locking to a satellite beacon through a search band of +/- 100 kHz about the selected frequency. Therefore accurate centering of the satellite beacon frequency is achieved despite the 10 kHz granularity of frequency selection.

The beacon receiver tracks the beacon signal's frequency drifts and measures its power level. The receiver generates a DC voltage output which represents, in logarithmic scale, the beacon power at the receiver's input. The output voltage to input power log-conformity is better than 0.1 dB over a 40 dB measuring range. The RC4000 monitors this DC voltage during tracking operations in order to keep the antenna peaked on the satellite.

### 1.5 Beacon Receiver Specifications

	BEACON RECEIVER	BEACON LEVEL DETECTOR (Differences Only)
Input Range	940 to 2,150 MHz	940 to 1,750 MHz
Input Impedance	50 ohm	
Input Level	-70dBm to -110dBm	
Signal Strength Output Range	+/- 10 VDC	
Signal Strength Output Scale	Logarithmic	
Signal Strength Output Slope	2dB/V (=> 40 dB) (0.5, 1.0, 4.0 optional)	
Signal Strength Output Resolution	0.04 dBm (10 / 1024) 3k 10 A/D @ 2dB/V	
PLL Noise Bandwidth	2 kHz	
PLL Damping Factor	0.7	
Post-detection Time Constant	100 ms	
Threshold for Reacquisition of Lock	< 43 dBHz	< 50 dBHz
Search Range	+/- 200 kHz	
Average Search Time	< 1 s	
Frequency Resolution	10 kHz	
Attenuation Control	0 - 40 dB	Fixed
Demodulation	CW or BPSK	CW only

## 2.0 HARDWARE

### 2.0 INSTALLATION

In order for this option to work properly, all other normal calibration steps described in the baseline manual must be performed correctly.

#### 2.1.2.4.2 Signal Strength (Receiver 2)

The RC4000 monitors the input power level signal and lock status from the beacon receiver via the External Receiver circuitry. When mounted internally, these connections are made inside the RC4000.


#### 2.1.2.4.8 RF connection (RF Input)

When mounted internally, the J11 L-Band RF input will be split internally to the beacon receiver and the RC4000's L-Band power detector (and possibly the internal DVB receiver).

### 2.2.9 Beacon Receiver mounting

When only the beacon receiver is present, the 8 inch x 5 inch beacon receiver card will be factory mounted internally above or to the side of the RC4000's board-stack, depending on the enclosure layout.

Depending on the overall size and internal layout of the RC4000 enclosure, the beacon receiver card may be housed in a small enclosure and mounted externally to the RC4000.

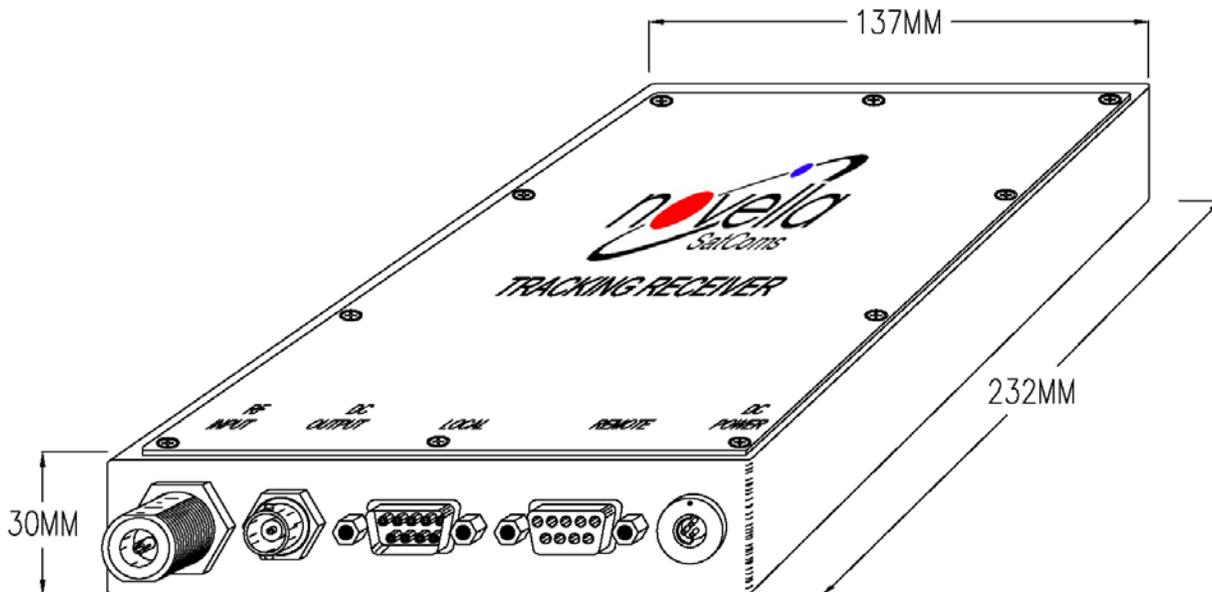

### 3.0 DETAILED OPERATION

#### 3.2.2.3.7 Unique LOCATE mode steps using the Integrated Beacon Receiver

When the beacon receiver option is present, additional steps will be added to the normal LOCATE sequence. Initiate the LOCATE mode as usual and select the satellite that you want to locate. As always, lat/lon from the GPS and a heading "estimate" from the compass will be obtained and the estimated pointing angles to the selected satellite will be displayed. Press <ENTER> to proceed and then select the desired polarization as usual.

If the selected satellite is from the user preset list and a beacon frequency has been programmed for the selected polarization, the beacon receiver will be automatically tuned before any LOCATE movements begin. The input power level and lock status from the beacon receiver will then be available as the SS2 inputs. Normal locate and autopeak operations will then proceed using the SS2 inputs as their source.

**CAUTION:** Many satellites utilize the same frequencies for beacons. If the beacon frequency for the satellite of interest is not unique, the Autopeak scan function could lock onto the wrong satellite.

### TRACK MODE

The inclusion of the integrated beacon receiver is basically transparent to the functionality of TRACK mode. TRACKing as described in appendix TRK will proceed as if an external receiver is providing signal strength to the SS2 input.

Prior to entering Track mode, the beacon should either be manually tuned via the beacon receiver maintenance screen or automatically tuned as part of a prior LOCATE.

Within the TRACK FACTORS configuration screen, the signal source should be programmed to SS2.

When the beacon receiver loses lock, its AGC output also drops to a minimum value. Therefore, loss of lock will manifest itself as a "loss of signal" situation.

### 3.3.1.1.3 Preset Satellites

In addition to the normal preset satellite data (see baseline manual), this option allows programming of two beacon frequencies (H and V) per satellite. The formatting of the preset satellite list screen has been modified slightly to accommodate the unique beacon receiver data items.

```
SAT#: 1   NAME:TELSTAR 12   CONFIG-SATS
LON:121.0W PO:-26.0         H:12198.90
INCL: 3 BAND:1 EPH:0       D:0 V:11701.03
<SCR> THRU LIST, <ENTER> TO MODIFY DATA
```

**H: HORIZONTAL BEACON <xxxxx.yy>MHz**

**V: VERTICAL BEACON <xxxxx.yy>MHz**

The H: and V: fields allow the user to program the beacon frequency for both polarizations.

NOTE: program the actual beacon frequency, not the IF frequency beyond the LNB. The RC4000 will automatically adjust according to the LO of the LNB.

If you do not want the RC4000 to automatically tune and use a beacon for a particular satellite, program 0.00 into H and V for that satellite.

If the system has a circularly polarized feed, describe the one beacon frequency in the H: field.

#### **D: BEACON DEMODULATION <0-CW 1-BPSK>**

This field allows the user to describe whether the satellite's beacon has BPSK modulated telemetry present or is just of the continuous wave (CW) type. NOTE: this setting ignored by the Beacon Level Detector hardware.

The following table shows an example list of North American Ku-band satellites and their published beacon frequencies.

SAT NAME	LON	Horizontal Frequency	Vertical Frequency
Nahuel 1	71.8 W	11700.00	11701.00
AMC-6	72.0 W	11702.00	12198.00
AMC-5	79.0 W	11701.00 11702.00	
AMC-9	83.0 W	11702.00	12198.00
IA-6	93.0 W	11702.00	12198.00
IA-5	97.0 W	11702.00	12198.00
AMC-4	101.0 W	11702.00	12198.00
AMC-1	103.0 W	12198.00	
AMC-15	105.0 W	11702.00	12198.00

### 3.3.2.12 Beacon Receiver Maintenance

When the integrated beacon receiver option is present, the MAINTENANCE menu allows the user to select Beacon Receiver maintenance by pressing the ENTER key (symbolized by <>).

1-VOLTS	2-DRIVE	3-TIME	MAINT
5-LIMITS	6-GPS COM	7-CMP COM	8-MOVETO
9-CMP CAL	0-SHAKE	+/-DVB	
		<>-BCN	.-SYS INFO

This mode allows the user to manually tune and test the Beacon Receiver's ability to lock onto a satellite's beacon. When the mode is entered, it displays the current IF frequency to which the receiver is tuned. Also displayed is the current attenuation (AN:) setting from the receiver.

-208.3	CCW	SS:623	.-AN:32	BCN
43.7		LK:LOCK	<>CW	5-RF:
-14.5		SP:SLOW	7-LO:10750.00	
TUNE	BEACON	RECEIVER	9-IF: 1448.90	

#### Manual Antenna Control

Azimuth, elevation and polarization angles and limit status are shown in the two left columns of the display. The antenna may be moved as if it is in the MANUAL mode. The azimuth may be manually jogged via the 4 and 6 keys, elevation via the 2 and 8 keys, and polarization via the 1 and 3 keys. Speed may be toggled via the 0 key.

Other keys will be used to tune the beacon receiver.

#### 5-RF: FREQUENCY<xxxxx.yy>MHz

This field allows the user to enter the actual frequency of the satellite's beacon. When the frequency is entered, the IF frequency will be derived from the LO frequency. The resulting IF frequency is displayed in the IF field. The beacon receiver will then be tuned to that IF frequency.

NOTE: upon entering this screen the RF field will be blank.

#### 7- LO: LO FREQ<0-30000>MHz

The LO frequency of the LNB must be programmed here in order for the actual frequency of beacons to be described in the satellite preset list.

#### 9- IF: I FREQ<940.0 - 2150.0>MHz

The intermediate frequency to program the beacon receiver to may be entered via this field.

After entering the IF frequency, a tuning command will be sent to the beacon receiver. The success of the programming is then confirmed by a status check of the receiver. During the time of tuning and status checking, the IF field will show "TUNING". If the status check shows that the receiver is now tuned to the entered IF frequency, then the IF value will be displayed in the field. If the status check does not confirm the programming, then the field will be filled with "\*\*\*\*\*".\*\*

NOTE: as described above (5-RF:), the IF field may also be derived by entering an RF value. After entering the RF value, the IF field will display "TUNING" just as if the IF value had been entered directly.

**.-AN: ATTENUATION <0-40>dB**

This field allows the user to change the input attenuation of the beacon receiver. Press the STOP (.) key to enter this field.

NOTE: the internal attenuation of the Beacon Level Detector is fixed at 10 dB. Attempting to modify this setting will result in "\*\*\*" being displayed in this field.

**<>CW/BP**

The ENTER key may be pressed to toggle the beacon receiver's demodulation mode between continuous wave (CW) or BPSK (BP) settings. NOTE: ignored by the Beacon Level Detector.

**LK:----, LOCK**

This field indicates the current lock status from the beacon receiver. "----" indicates that the beacon receiver currently has not established a lock on the tuned frequency. "LOCK" indicates that a lock has been established.

**RF: / SS: / AD:**

The signal level seen by the L-band (RF) power detector, the beacon receiver's AGC (SS) or a level internal to the beacon receiver (AD) is shown in this field. The Scroll Down key will scroll between RF, SS and AD.

Upon entering this screen, the beacon receiver's AGC (SS) value will be displayed. The SS value will probably be of most use for determining the functionality of the beacon receiver.

The RF value is an indication of total L-band power. This may be useful for finding a satellite while jogging the antenna from this screen.

The AD value is an internal beacon receiver signal level value that will probably only be useful for debugging purposes by RCI personnel.



## 4.2 TROUBLESHOOTING

If the functionality of the beacon receiver is in question, first go to the maintenance screen and confirm communication with the receiver. If the receiver cannot be tuned, check the internal cabling between the beacon receiver and the rest of the RC4000.

If a LOCATE to a satellite does not work, manually position onto the satellite and confirm (via the maintenance screen) that a lock can be obtained at that frequency.

The inability to obtain lock may be due to low signal level reaching the beacon receiver. From the maintenance screen, set the attenuation to 0 to make the receiver as sensitive as possible.